



| CONVENIENCE AND PROCESSED FOOD



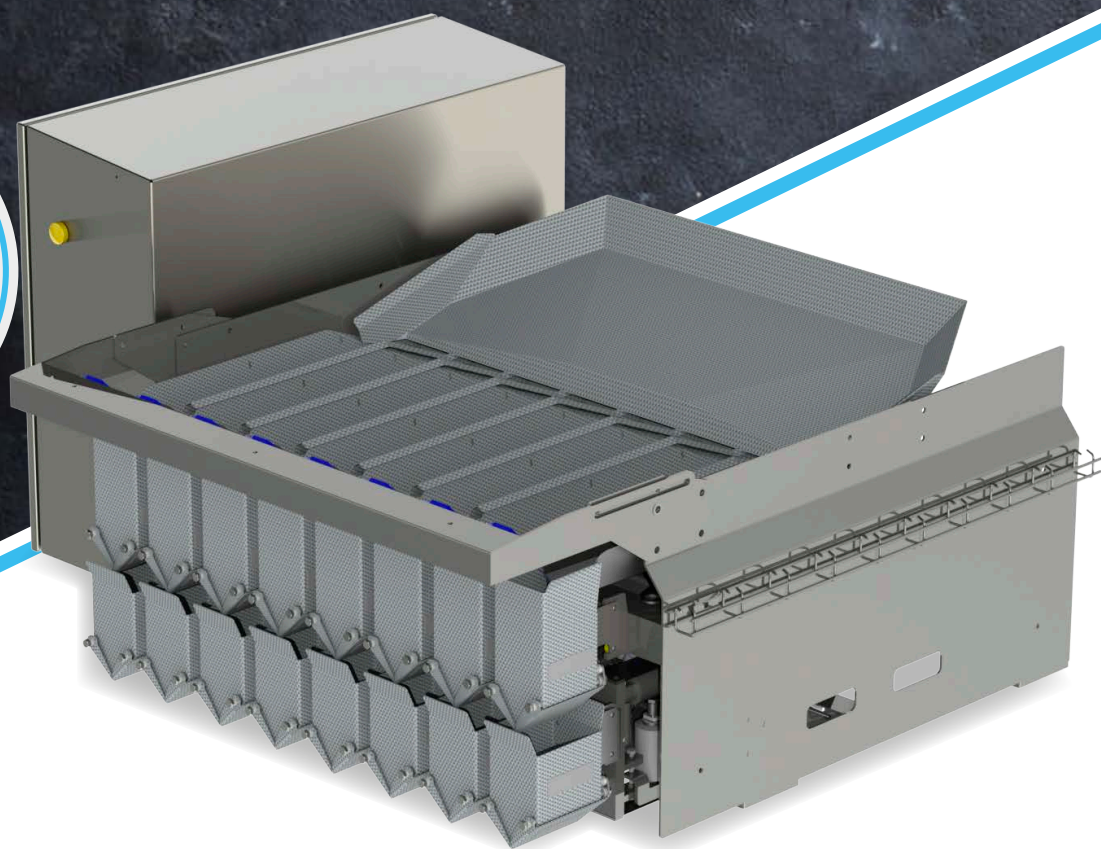
NEWTEC

# WEIGHING MACHINE

2008PCM

OPTION

16-CHANNEL SOLUTION:  
2X2008PCM



## Complex weighing made easy

### Advantages

High weighing accuracy: Typical giveaway: less than 0.4%

High speed – up to 70 portions/min. at 50 g to 500 g

Small machine with low product drop height

Removable chutes for cleaning

WebServices available for remote servicing and for capturing production data

### Processed food such as:

Fresh cut fruits

Snack products

Small frozen products

Similar small products




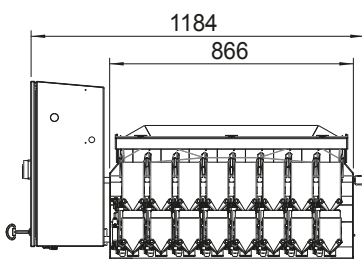
WEBSERVICES AVAILABLE  
FOR REMOTE SERVICING

**YOUR ADVANTAGES**

- Quick dismantling and assembly of weigh pans and vibrator chutes – no tools required
- Easy access for cleaning and service
- Protection class: IP65

**NEWTEC SOFTWARE**

- Intuitive user interface
- Informative and future-proof
- Same user interface on all Newtec weighing and packing machines

**COMBINATION WEIGHER WITH 8 CHANNELS**

<b>Speed:</b>	High speed – up to 70 portions/min. at 50 g to 500 g
<b>Capacity:</b>	50 g – 500 g
<b>Weigh pan volume:</b>	0.5 L
<b>Designed for:</b>	Check weigher solution
<b>Material:</b>	According to the EU rules on food contact materials

**Air requirement:**

Connection:	3/8"
Min. pressure:	6 bar (0.6 Mpa)
Consumption:	25-50 NL/min.
<b>Electrical requirement:</b>	3x400 VAC (N) PE 50 Hz 1.5 kW
<b>Environment:</b>	5 °C – 40 °C
<b>Weight:</b>	Approx. 280 kg

**NEWTEC**

Stærmosegårdsvej 18  
5230 Odense M  
Denmark

T: +45 66 15 84 44  
E: sales@newtec.dk  
CVR: 17 04 56 36

[www.newtec.com](http://www.newtec.com)