


## Weighing machines

**HIGH SPEED  
& WEIGHING  
ACCURACY**

**QUICK  
DISMANTLING  
AND EASY  
TO WASH  
DOWN**

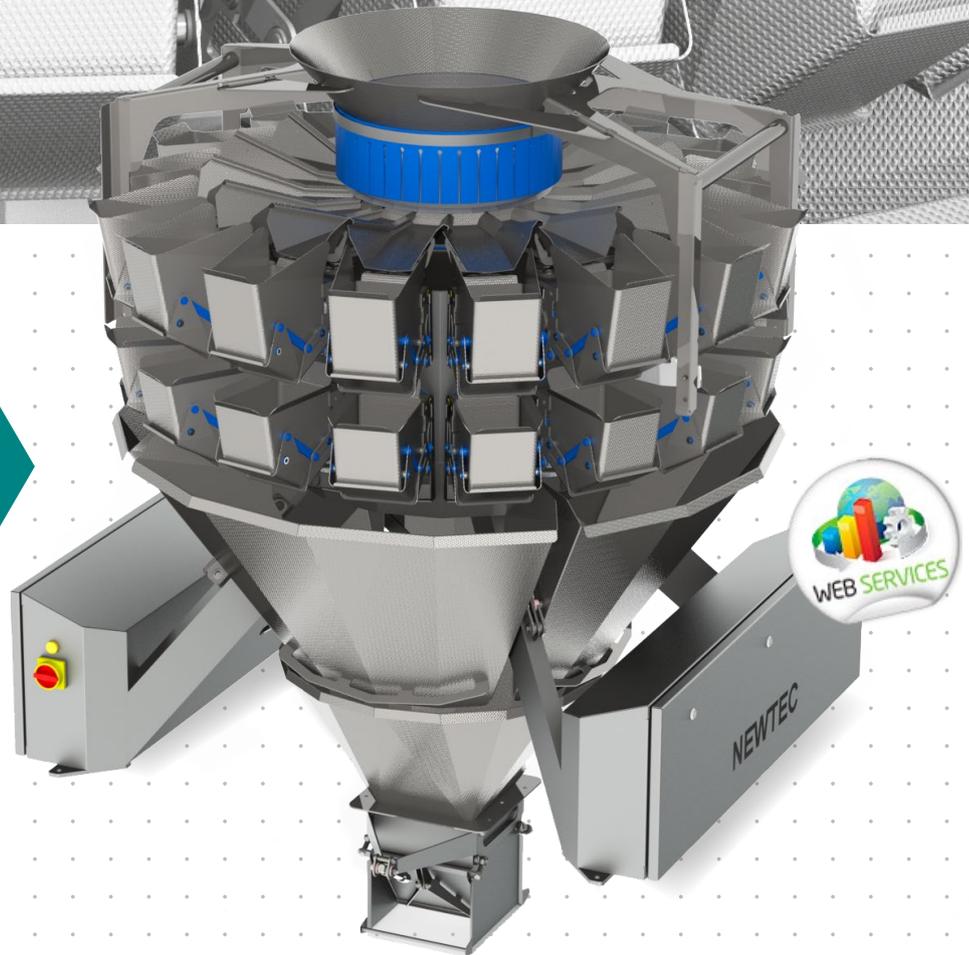

## **NEWTEC** ROUND WEIGHER **4016/4RW**

**Application:** Processed food such as:

- Dried fruits
- French fries
- Fresh vegetables
- Frozen fish and vegetables

**Advantages:**

- High weighing accuracy: Typical giveaway: less than 0.2%
- High speed - up to 90 portions/min.
- VarioSpeed ensures optimum operation – also when the products are fed irregularly
- Unique and advanced flow control at start-up: height of inlet funnel is controlled by the interface and the weighing program
- WebServices enabled for remote servicing and for capturing production data
- MachineLink enabled - from only one touch panel, either on our Round Weigher or Check Point, recipe change and start/stop for both machines is possible

# Weighing machines

## NEWTEC ROUND WEIGHER 4016/4RW

### Your advantages

- Quick dismantling and assembly of weigh pans, vibrator chutes and funnels for cleaning - no tools required
- Easy access for service
- Protection class: IP65



### Newtec software

- Intuitive interface
- Powerful and future-proof
- Same interface on all Newtec weighing and packaging machines

### Combination weigher with 16 channels

**Speed:** Up to 90 portions/min.

**Capacity:** 500 g – 5000 g (depending on product)

**Weigh pan volume:** 4 L (up to 10 L in one portion)

**Material:** all contact surfaces are made in rigidized stainless steel – especially suitable for sticky products

#### Air requirement for Portion Collecting System:

Connection: 3/8"

Min. pressure: 6 bar (0.6 Mpa)

Consumption: 100 NL/min.

**Electrical requirement:** 3x400 VAC (N) PE 50 Hz 4.5 kW

**Environment:** 5°C – 40 °C /41 °F – 104 °F

**Weight:** 690 kg (excl. Portion Collecting System)

